ELEVATION CERTIFICATE

O N. B. NO 3067 6027 Expres May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	pages.
BUILDING DWNER'S NAME -	FOR INSURANCE COMPANY USE
STREET ADDRESS IN COUENOR	POLICY NUMBER
Acceptance of the state of the	COMBINATION
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	COMPANY NAKO NUMBER
STONE CLEEK No A PLANET TO STONE CLEEK NO A PLAN	
CITY LOT 24, 7	BLOCK A
CENTRAL POINT STATE	ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION	97502
Provide the following from the proper FIRM (See Instructions):	ON .
1. COMMUNITY NUMBER 2 PANEL AND TOO	
1. DATE OF FIRM ROLEX 5. FIRM ZONE	2. 2. 2. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.
1410092 0001 C 1-19-82 A	(in AO Zones, use dep(ti)
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD 28. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE the community's BFE: 11293. Steet NGVD (or other FIRM datum—see Section B, Item 7)	9 Li Other (describe on back) for this building site, Indicate
SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on describes the subject building's reference level.	
(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the select of ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐	of the reference level from ection B, Item 7). feet above or bove or below (check is lowest floor (reference in the conversion in place, in which on Elevation Certificate
The elevation of the lowest grade immediately adjacent to the building is: 1293.0 feet NGVD (c. Section B, Item 7).	r other FIRM detum ass
Control D. Reitt 7).	N OUNT FIRM GRUM-500
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level indinot the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of or" as defined by the ordinance is:	cated in Section C, Item 1 the building's "lowest Item 7).

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not-included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered. I STRRED

PROFESSIONAL I certify that the information in Sections B and C on this certificate represents my best efforts to Interpretate against EYOR I understand that any false statement may be punishable by line or imprisonment under 18 U.S. Code-Certien 1001.

CERTIFIER'S NAME

HERTS FROM

A. PARBER

COMPANY NAME

PRESIDENT

PARBER

COMPANY NAME

PARBER

CITY

STATE

CITY

STATE

CITY

STATE

CITY

STATE

COMPANY NAME

PHONE

COMPANY NAME

PHONE

COMPANY NAME

CITY

STATE

CITY

STATE

CITY

COMPANY NAME

PHONE

COMPANY NAME

CITY

STATE

CITY

STATE

CITY

COMPANY NAME

PHONE

COMPANY NAME

CITY

STATE

CITY

STATE

CITY

STATE

CITY

STATE

COMPANY NAME

PHONE

COMPANY NAME

CITY

STATE

CITY

STATE

CITY

STATE

COMPANY NAME

CITY

STATE

CITY

STATE

CITY


STATE

COMPANY NAME

CITY

STATE

CITY

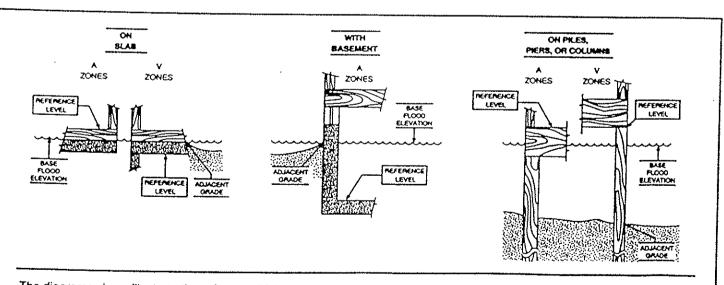

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.