ELEVATION CERTIFICATE

VITENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to revide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to request for a Letter of Map Amendment or Revision (LOMA or LOMB), instructions for completing this form can be found on the following pages.

` .	FOR INSURANCE COMPANY USE								
BULDING IOWNERS NAME	POLICY NUMBER								
STREET ADDRESS (Including Apo	COMPANY NAIC NUMBER								
V / (2//2 /	IN LAME		HOO IS YND BOX MOMBEN	٠.	CONTRACT INVO INVIDEN				
OTHER DESCRIPTION (Lot and BI	ock Numbers, alc.)		4 1						
het 342 Jackson Creek Ristates Unit VII									
Central	Pent		·	STATE	21PC00E 97502				
	SECTION B FL	OOD INSUR	ANCE RATE MAP (FIRM)	INFORMATION					
Provide the following from the proper FIRM (See Instructions):									
1, COMMUNITY NUMBER .	2. PANEL HUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	8. BASE FLOOD ELEVATION , (In AO Zones, use depth)				
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): LINGVU 29 LI Uther (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building cho, incloate									
the community's BFE: LLLL Lifeet NGVD (or other FIRM datum—see Section B, Item 7).									
SECTION C BUILDING ELEVATION INFORMATION									
(c). FIRM Zone A (without B) below (check one) the (d). FIRM Zone AO. The floorene) the highest grade a	ling's reference level. AH, and A (with BNGVD (or other FIR. and V (with BFE), at an elevation of L. The floor used the highest grade adjacent to the building ance with the common system used in decay. (NOTE: If the electron Page 2.) sed appears on FIR.	FE). The top M datum-see The bottom of as the referent acent to the bence level from ing. If no flood unity's floodpl itermining the levation datum the alevation M: X Yes C	of the reference level floor Section B, item 7), if the lowest horizontal str feet NGVD (or other FIR nce level from the selected uliding, in the selected diagram is depth number is available ain management ordinance above reference level elem to the datum exetem in No (See Instructions or	r from the selected uctural member of the datum—see Set diagram is LLL 1.LL feet at the building the Total Digital on the FIRM in Page 4)	od diagram is at an elevation of the reference level from. oction B, Item 7). Lifeet above C or over or below (check a lowest floor (reference No Unknown D 29 Other (describe ent than that used on				
(NOTE: Use of construction case this certificate will only will be required once construction.	n drawings is ofily v be valid for the buil uction is complete.)	alld it the build ding during the	fing does not yet have the a course of construction.	reference level (A post-constructi	ion Elevation Certificate				
3. The elevation of the lowest grade immediately adjacent to the building is: 1135.6 feet NGVD (or other FIRM datum-see Section B, Ijem 7).									
SECTION D COMMUNITY INFORMATION									
I, If the community official res is not the "lowest floor" as of floor" as defined by the ordi	lefined in the comm	unity's floodpl:	ain management ordinand	e, the elevation of					
2. Date of the start of construc									

(NAT -10 20 NOT 12.01

Sec. Sec.

BECTION E-CERTIFICATION NYALTO

This certification is to be signed by a fand surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1+A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required.


Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifler is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, them 1, must still be entered.

I certify that the information in Sections 8 and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	C	Jensen LICENSE NUMBER (or Affix Sout) 7467						
- John	t. Vensen							
TITLE		COMPANY	NAME ·	/				
ADDRESS	laer.		easen . as	sacrates				
SIGNATURE 0	Y F. Wacks	crry	1-ditiend	BTAT O-	97 COV			
SIGNATORE	m The or	in	c/12/90	PHONE				
Copies should be ma	de of this Certificate fo	rt 11 community of		341 119	4352			
COMMENTS:		· · · · · · · · · · · · · · · · · · ·		7,100-00-00-00-00-00-00-00-00-00-00-00-00-	· · · · · · · · · · · · · · · · · · ·			

		•	r					
، سيسينين ، سيسينين		• •						
		. •						
	——————————————————————————————————————			<u> </u>				
<u> </u>			SC 15 - + 11 Sc					
								

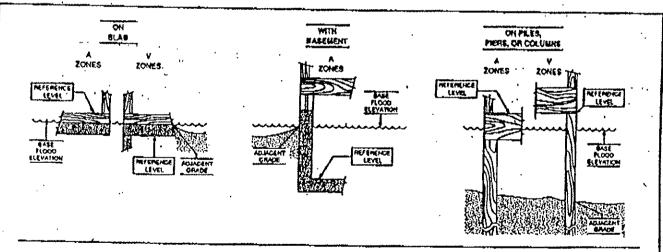

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.